


## 5090 Emerald Stainless steel lever handle

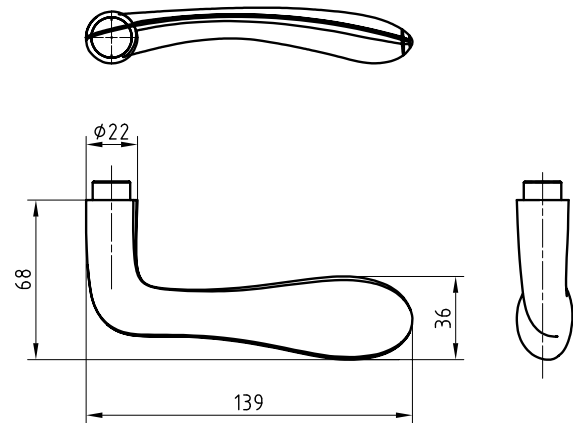

Picture shows handle with 5620C rose

### Product profile

Commercial buildings, administrative centres and superior quality residential developments

### Standard version

- Satin stainless steel surface
- Lever handle length 139 mm, Ø 22 mm
- Projection 68 mm
- Prepared for fixed mobile mounting with easyfix
- Steel galvanised square spindle
- 16-mm Glutz glide bearing, tested for 2.5 million cycles

### Options

16-mm twin bearing with easyfix (fixed mobile)

### Important note

To achieve usage class 4 in accordance with EN 1906, a 9-mm steel or 8-mm stainless steel square spindle is needed

Lever handle available on the right or left

### 5090 · ① · ② · ③ · ④ · ⑤ · ⑥

① Execution	② Guide	③ Spindle	④ Bolt length	⑤ Spindle material	⑥ Surface
<b>01</b> Lochteil links	<b>0</b> glide	<b>80</b> 8 mm	<b>00</b> Without	<b>0</b> Without	<b>00</b> Stainless steel matt
<b>02</b> Lochteil rechts	<b>8</b> twin halbauswärts	<b>85</b> 8,5 mm	<b>04</b> 79 mm	<b>1</b> Galvanized steel	<b>11</b> Stainless steel polished
<b>11</b> Stifftteil links		<b>90</b> 9 mm	<b>10</b> 104 mm	<b>2</b> Stainless steel	<b>44</b> Antibacterial
<b>12</b> Stifftteil rechts			<b>99</b> Auf Anfrage		<b>51</b> RAL 9005 black matt
<b>52</b> Paar Stifftteil links					<b>99</b> On request
<b>53</b> Paar Stifftteil rechts					